


Triton Baghouse

- 3200 cfm, 27" Hg Vacuum Rated
- Requires 110V AC pulsation system to back flush filters
- Requires a plant air supply, 5-7 cfm minimum, 90 psi
- Air hoses 250 psi rated industrial rubber hose with brass fittings.
- Stainless steel tube sheet for filter bags
- Thirty polypropylene filter bags x 40"
- Thirty Heavy duty galvanized steel hi-vac cages
- Pneumatic regulator and pressure gauge
- 50' air and electrical umbilical cord with holder
- Top dished head, bolted on, with three lifting lugs (Hinges to swing left/right)
- 8" Air inlet with ANSI flange
- 8" Air outlet with ANSI flange
- 16" Side cleanout door
- Base frame with fork lift pocket
- 10" flange on bottom with 6" male cam-lock and cap (optional slide valve for dust control)
- Four removable legs with pivot plate feet
- 2800 lbs tare weight
- 85" L x 85" W x 133" H
- A 48" x 48" x 40" H box can fit inside legs



Solids Recovery Package

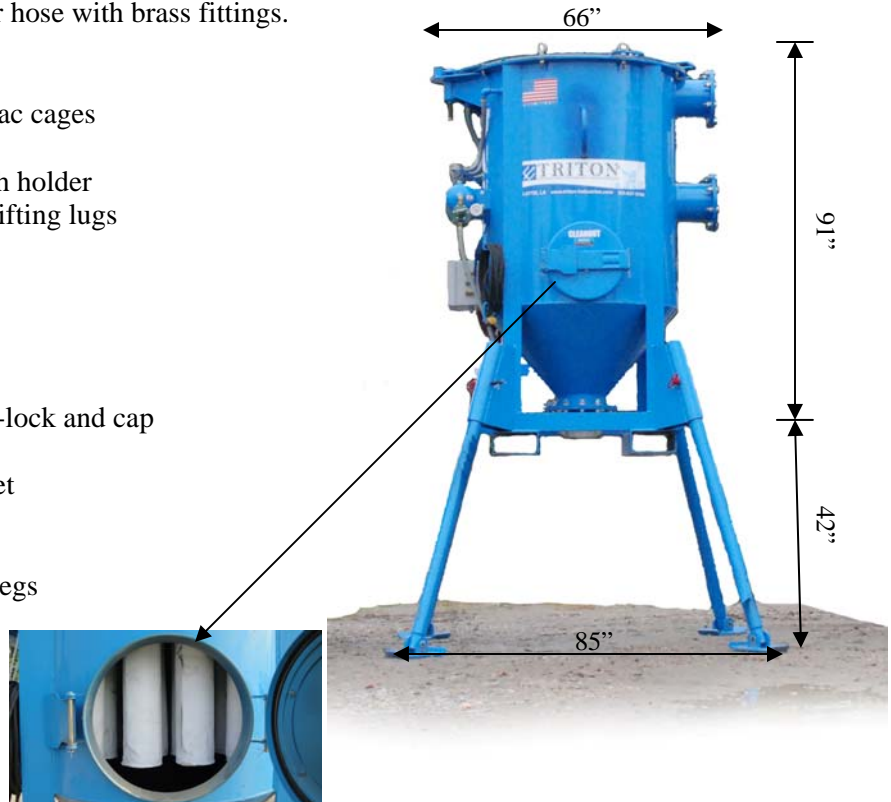

Collection Tank

Baghouse

Triton 1500 Vacuum System